




Engineered
in Italy

**PERC
HALF-CUT**

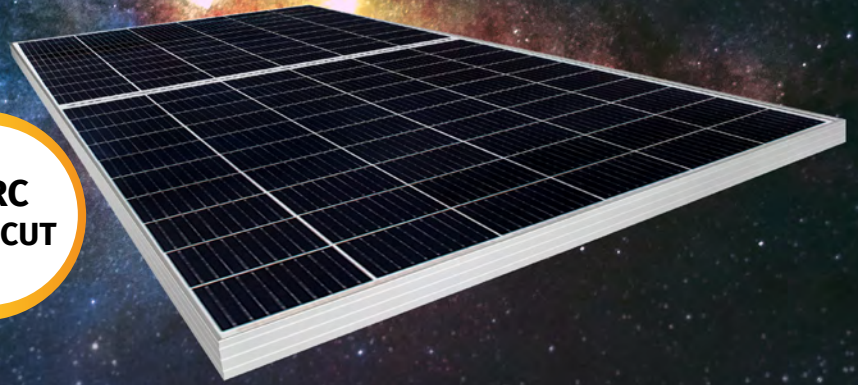

FU 330 / 340 MV NEXT Pro

Monocrystalline Photovoltaic Module - 120 half-cut cells





- > IEC 61215:2016 - IEC 61730:2016 & Factory Inspection
- > Fire Class C as per UL 790



CE

GENERAL FEATURES

- 15-year product warranty
- 158.75 mm half-cut PERC cells
- High module efficiency up to 20.15%
- 2 independent section design secures a higher energy yield in case of shading
- Lower risk of micro cracks and hot-spot
- Improved low light performance
- Low NMOT, improving the power generation efficiency
- Half cut design in combination with multi busbar reduce operating current and internal resistance

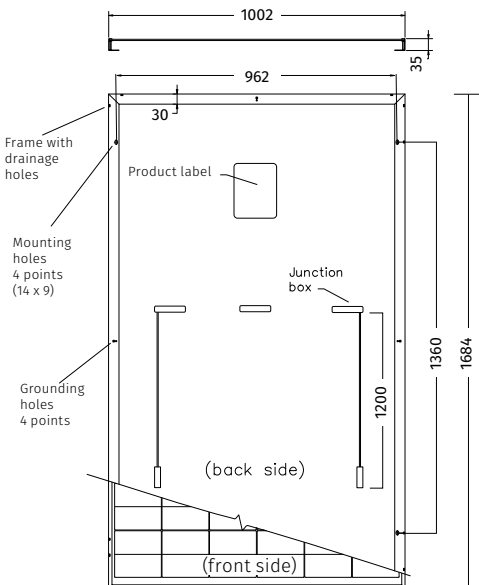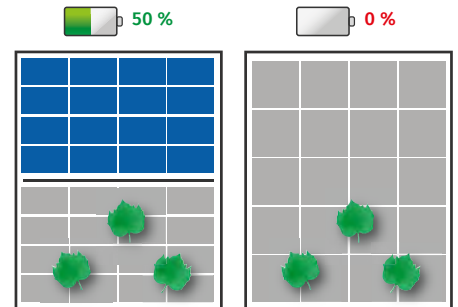

Note: dimensions in mm
tolerance +/- 2 mm

GUARANTEES

Performance guarantee

Max power decrease **0.5%/year**

97% at the end of first year

90% at the end of 20th year

87% at the end of 25th year


NEW

Product guarantee

15 YEARS

NEW

- Market standard performances
- FuturaSun performances

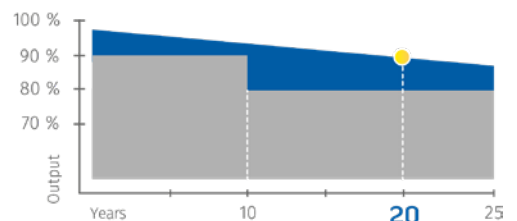

ELECTRICAL DATA

MODULE NEXT PRO	FU 330 MV NEXT Pro	FU 340 MV NEXT Pro
-----------------	--------------------	--------------------

Standard Test Conditions STC: 1000 W/m² - AM 1.5 - 25 °C - tolerance: Pmax (±3%). Voc (±4%). Isc (±5%)

Module power (Pmax)	W	330	340
Open circuit voltage (Voc)	V	41.53	42.04
Short circuit current (Isc)	A	10.09	10.25
Maximum power voltage (Vmpp)	V	34.64	35.18
Maximum power current (Impp)	A	9.56	9.70
Module efficiency	%	19.56	20.15

Nominal Module Operating Temperature NMOT: 800 W/m² - T=42 °C - AM 1.5

Module power (Pmax)	W	246	254
Open circuit voltage (Voc)	V	39.34	39.82
Short circuit current (Isc)	A	8.13	8.27
Maximum power voltage (Vmpp)	V	32.24	32.73
Maximum power current (Impp)	A	7.63	7.76

TEMPERATURE RATINGS

Temperature coefficient Isc	%/°C	0.05
Temperature coefficient Voc	%/°C	-0.28
Temperature coefficient Pmax	%/°C	-0.35
NMOT **	°C	42
Operating temperature	°C	from -40 to +85

**Nominal Module Operating Temperature *For All Black version

MECHANICAL SPECIFICATIONS

Dimensions	1684 x 1002 x 35 mm
Weight	19.5 kg
Glass	High transmission, Low iron, Tempered, ARC, Transparent, 3.2 mm
Cell encapsulation	EVA (Ethylene Vinyl Acetate)
Cells	120 monocrystalline half-cut PERC cells 158.75 x 79.37 mm
Backsheet	White or black* composite multilayer film
Frame	Silver or black* anodized aluminium frame with mounting and drainage holes
Junction box	Certified according to IEC 62790, IP 68 approved, 3 bypass diodes
Cables	Solar cable, length 1200 mm or customized assembled with TongLing TL-CABLE01S
Maximum reverse current (Ir)	20 A
Maximum system voltage	1500 V
Mechanical load (snow)	Design load: 3600 Pa
Mechanical load (wind)	Design load: 1600 Pa
Protection Class	II - accordance to IEC 61730
Manufacturer	Made in China

Authorized Dealer



FuturaSun srl

Riva del Pasubio, 14 - 35013 Cittadella - Italy
Tel + 39 049 5979802 Fax + 39 049 0963081
www.futurasun.com - info@futurasun.it

2021_120mv_330-340_NEXT_Pro_en